


CALZE DI VETRO

FIBER GLASS SLEEVES

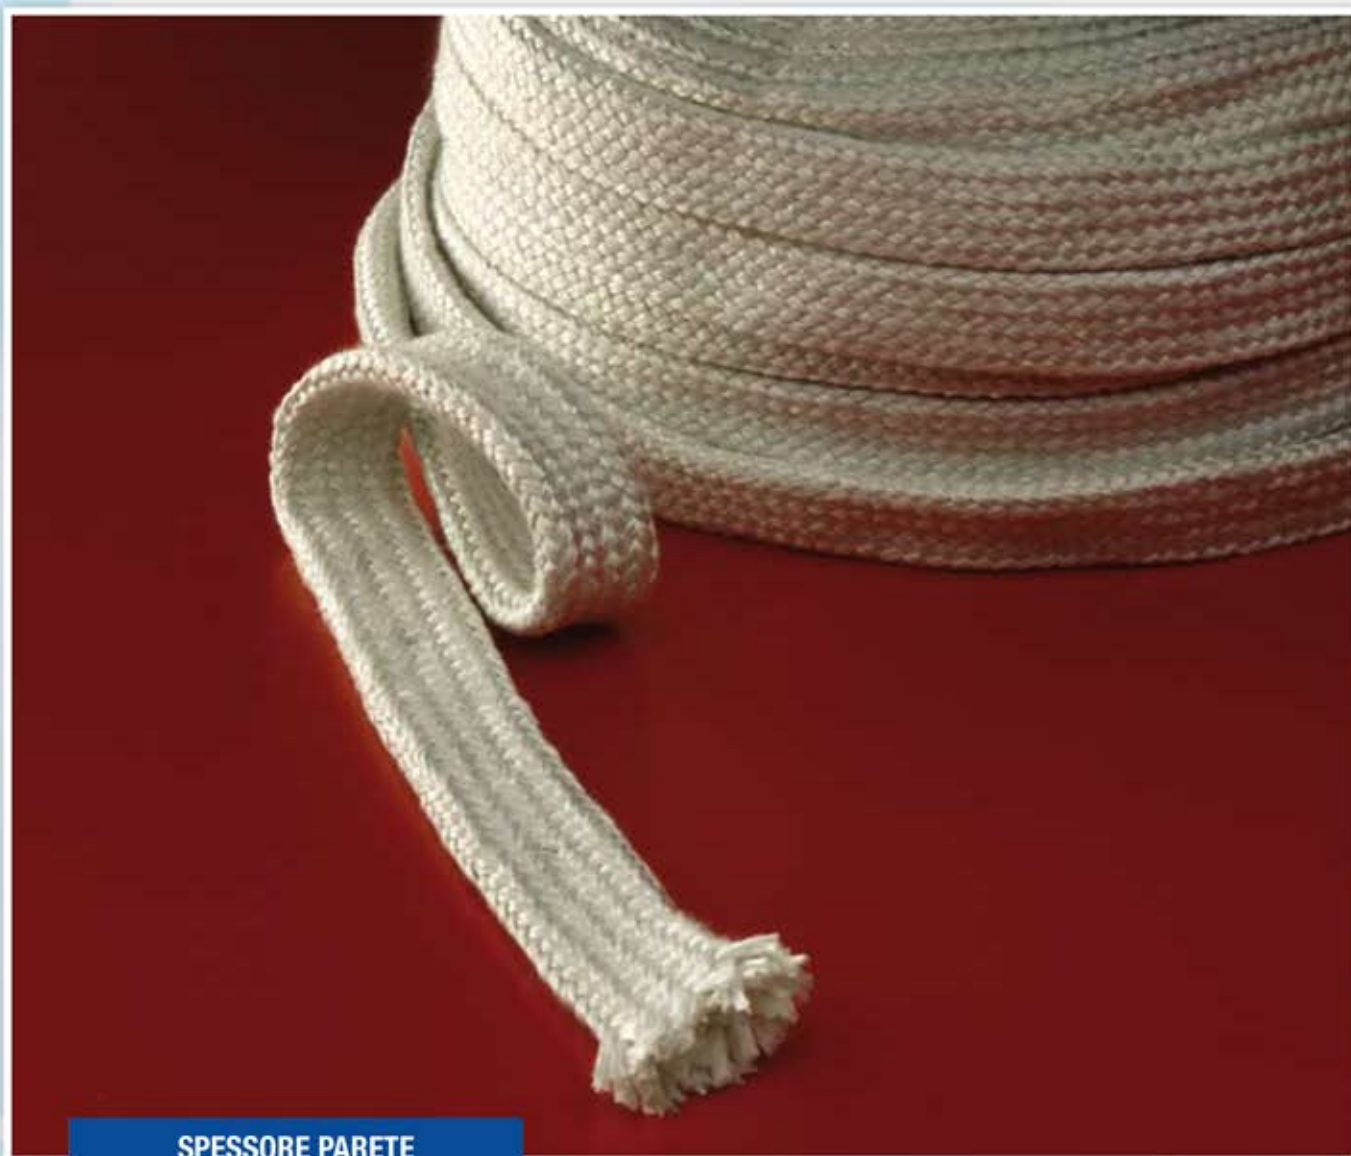

SPESSORE PARETE Wall thickness

mm 2	mm 3
10	-
15	-
20	20
25	25
30	30
35	35
40	40
50	50
60	60
-	70
-	80
-	90
-	100

APPLICAZIONI:

Isolamento termico per tubi flessibili e cavi elettrici

APPLICATIONS:

Thermal insulation for flexible hoses and electrical cables

TEMPERATURA: 550° C

PICCHI: 700° C Max

TEMPERATURE: 550° C

PEAK: 700° C Max